


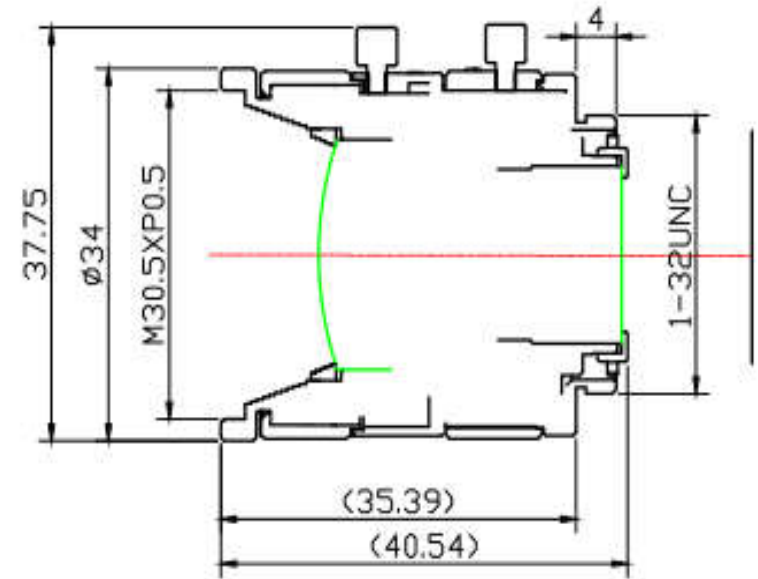

SPECIFICATION		
Sensor Type	2/3"	
resolution	2M	
Focal Length	25±5% mm	
FNo.	F1.4~22	
Optical FOV(D)	24.7°±2°	
Optical FOV(H)	19.9°±2°	
Optical FOV(V)	15°±2°	
TV Distortion	-0.27%	
Focusing range	0.15m~∞	
Mechanical BFL(E)	17.526mm	
Control	Focus	Mannual
	Iris	Mannual
Mount	C	
filter size	M30.5xP0.5	
Suitable temperature	-10℃~+50℃	

Feature:

extra large aperture, starligh level imaging lense
Multi-coated, higher transmittance and less stray light
HRI and LD glass, high resolution imaging optics
glass+metal desigh, broad range of operating temperature
used for 2/3" megapixel camera gun

③					MATERIAL			洛阳拜波赫光电科技有限公司		
②										
①					TREAT			PART NO.	BBH03008-2M2514	
①	19.12.04					NAME	DATE			
REV.	DATE	DESCRIPTION	REVISED	APPR.	DRAWN	ZKW	17.01.22	PART NAME		
				3RD ANGLE PROJN	CHECKED				REV.	
				⊕	AUDI				1	
					APPR.			SCALE	2:1	SHEET 1 OF 1