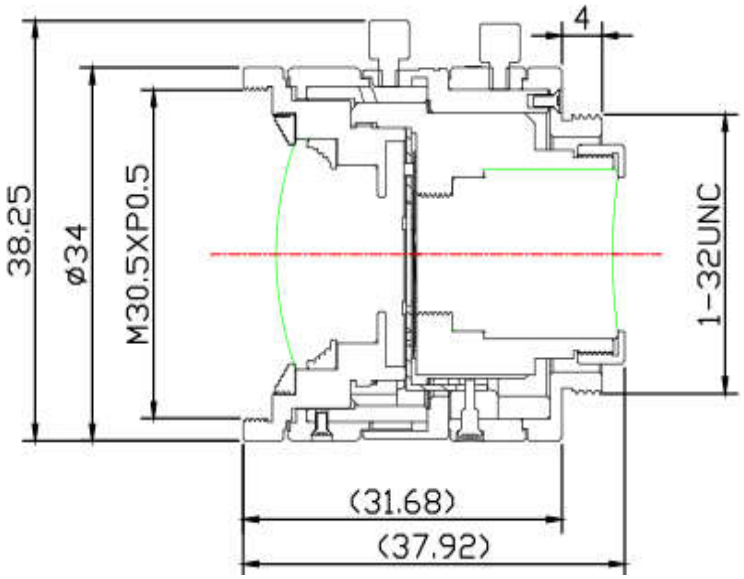

SPECIFICATION		
Sensor Type		2/3″
resolution		2M
Focal Length		16±5% mm
FNo.		F1.4～22
Optical FOV(D)		37.61°±2°
Optical FOV(H)		30.38°±2°
Optical FOV(V)		22.92°±2°
TV Distortion		-1.00%
Focusing range		0.3m～∞
Mechanical BFL(E)		17.526mm
Control	Focus	Mannual
	Iris	Mannual
Mount		C
filter size		M30.5xP0.5
Suitable temperature		-10℃～+50℃

Feature:

extra large aperture, starligh level imaging lense
Multi-coated, higher transmittance and less stray light
HRI and LD glass, high resolution imaging optics
glass+metal desigh, broad range of operating temperature
used for 2/3″ megapixel camera gun

3					MATERIAL			洛阳拜波赫光电科技有限公司		
2										
1					TREAT			PART NO.	BBH03009-2M1614	
0	19.12.04					NAME	DATE			
REV.	DATE	DESCRIPTION	REVISED	APPR.	DRAWN	ZKW	17.04.03			
			3RD ANGLE PROJN		CHECKED			PART NAME		REV.
					AUDI					1
					APPR.			SCALE	2:1	SHEET 1 OF 1